






TECHNICAL DATA

		250 H	250 H E
Maximum flow rate at 100 Pa	m ³ /h	250	250
Ventilated area up to	m ²	115	115
Energy efficiency class	-	A	A*
Efficiency up to	%	93	88,8
Energy consumption	W	18-216	18-194
Preheater power	W	500	500
Diameter of the nozzles	mm	125	125
Sound power level Gear I	dB(A)	40	40
Filtration class	-	ISO COARSE 75%	+ ePM 10 50%
Weight	kg	41	41
Type of exchanger	-	plastic	enthalpic
Automation	-	V2	V2
Wall controller	-	yes	yes
XF System	-	no	no
Internet module	-	no	no
Painted interior	-	no	no

*When using local demand control

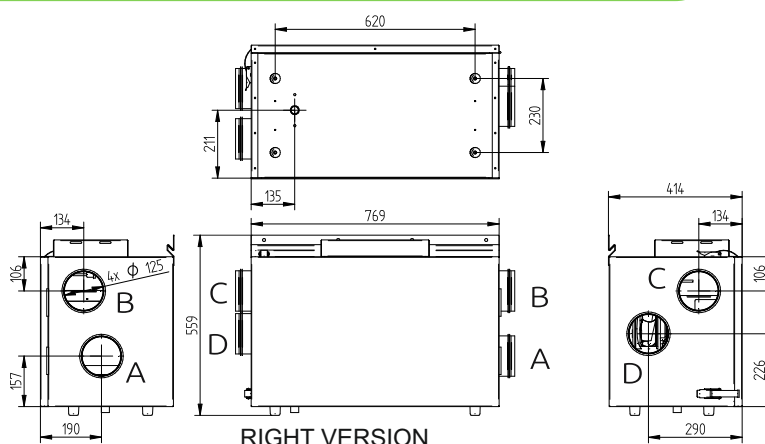


RIGHT VERSION



LEFT VERSION

- A - air drawn from outside the building
- B - air drawn from rooms
- C - air supplied to rooms
- D - air exhausted outside the building

Resistance/Performance

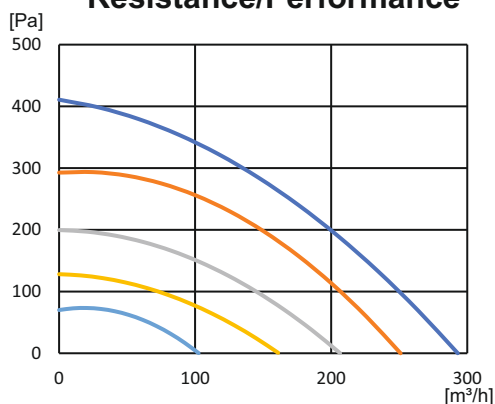

Efficiency/Performance

