



TECHNICAL DATA

		545 XF	545 XF L	545 XF E	545 XF L E
Maximum flow rate at 100 Pa	m ³ /h	595	595	595	595
Ventilated area up to	m ²	270	270	270	270
Energy efficiency class	-	A	A	A	A
Efficiency up to	%	92	92	91	91
Energy consumption	W	19-316	19-316	19-317	19-317
Preheater power	W	500	500	500	500
Diameter of the nozzles	mm	200	200	200	200
Sound power level Gear I	dB(A)	40	40	40	40
Filtration class	-	ISO COARSE 75% + ePM 10 50%			
Weight	kg	71	71	71	71
Type of exchanger	-	plastic	plastic	enthalpic	enthalpic
Automation	-	V2	V2	V2	V2
Wall controller	-	yes	yes	yes	yes
XF System	-	yes	yes	yes	yes
Internet module	-	no	no	no	no
Painted interior	-	no	no	no	no

*When using local demand control

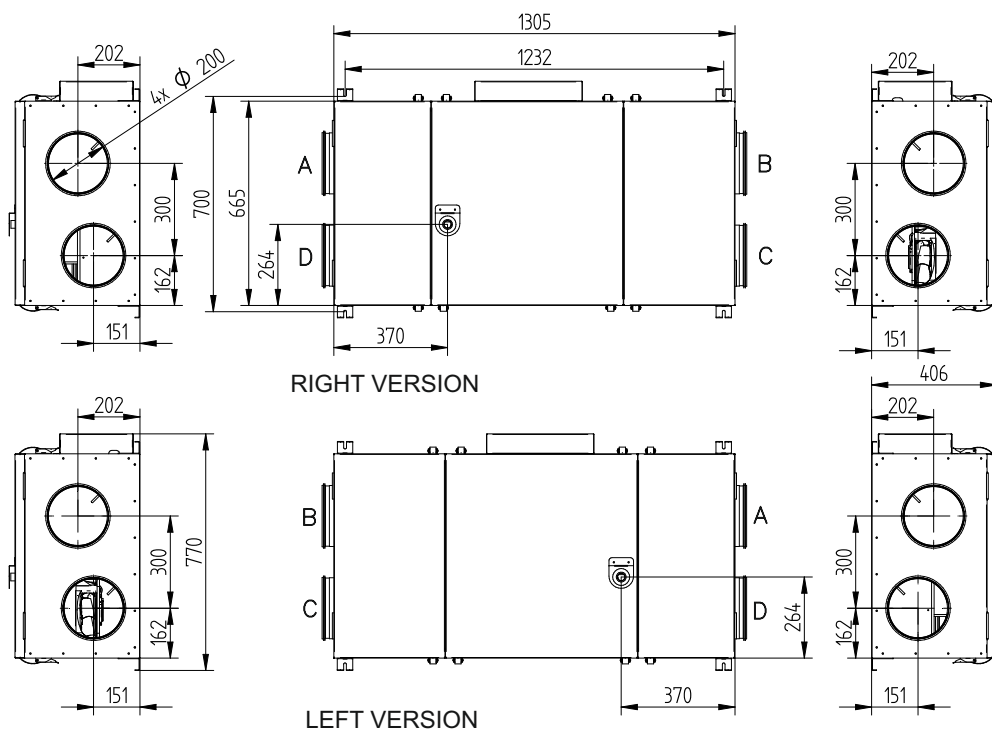

Resistance/Performance

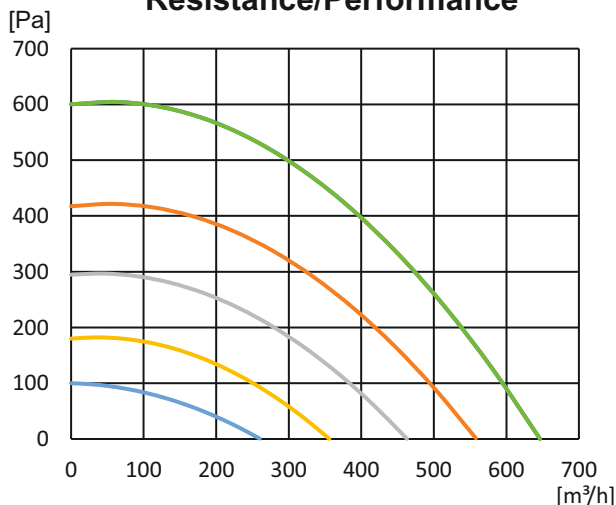

Efficiency/Performance

