


TECHNICAL DATA

		300 V	300 V E	300 V XF	300 V XF E
Maximum flow rate at 100 Pa	m ³ /h	332	332	332	332
Ventilated area up to	m ²	150	150	150	150
Energy efficiency class	-	A	A	A	A
Efficiency up to	%	92	91	92	91
Energy consumption	W	17-243	17-208	17-243	17-208
Preheater power	W	500	500	500	500
Diameter of the nozzles	mm	125	125	125	125
Sound power level Gear I	dB(A)	40	40	40	40
Filtration class	-	ISO COARSE 75% + ePM 10 50%		ISO COARSE 75% + ePM 10 50%	
Weight	kg	28	28	28	28
Type of exchanger	-	plastic	enthalpic	plastic	enthalpic
Automation	-	V3	V3	V2	V2
Wall controller	-	yes	yes	yes	yes
XF System	-	no	no	yes	yes
Internet module	-	yes	yes	no	no
Painted interior	-	no	no	no	no



A - air drawn from outside the building
 B - air drawn from rooms
 C - air supplied to rooms
 D - air exhausted outside the building

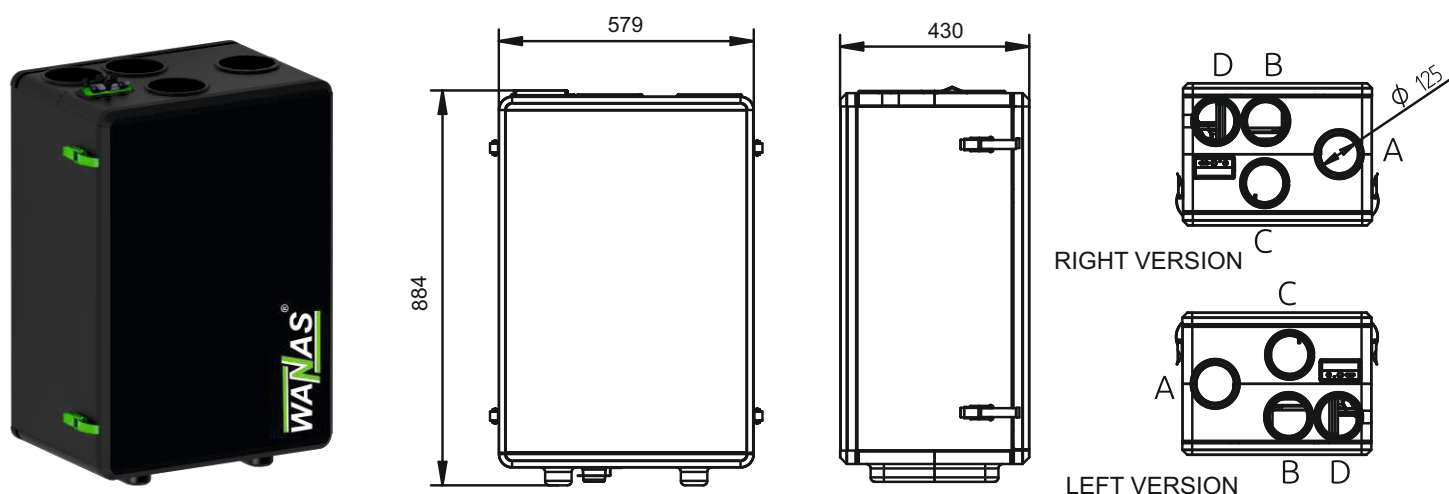