


TECHNICAL DATA

		340 V	340 V L
Maximum flow rate at 100 Pa	m ³ /h	340	340
Ventilated area up to	m ²	155	155
Energy efficiency class	-	A+*	A+*
Efficiency up to	%	92	92
Energy consumption	W	18-149	18-149
Preheater power	W	500	500
Diameter of the nozzles	mm	160	160
Sound power level Gear I	dB(A)	38	38
Filtration class	-	ISO COARSE 75% + ePM 10 50%	
Weight	kg	57	57
Type of exchanger	-	plastic	plastic
Automation	-	V3	V3
Wall controller	-	yes	yes
XF System	-	no	no
Internet module	-	yes	yes
Painted interior	-	no	no


*When using local demand control



- A - air drawn from outside the building
- B - air drawn from rooms
- C - air supplied to rooms
- D - air exhausted outside the building

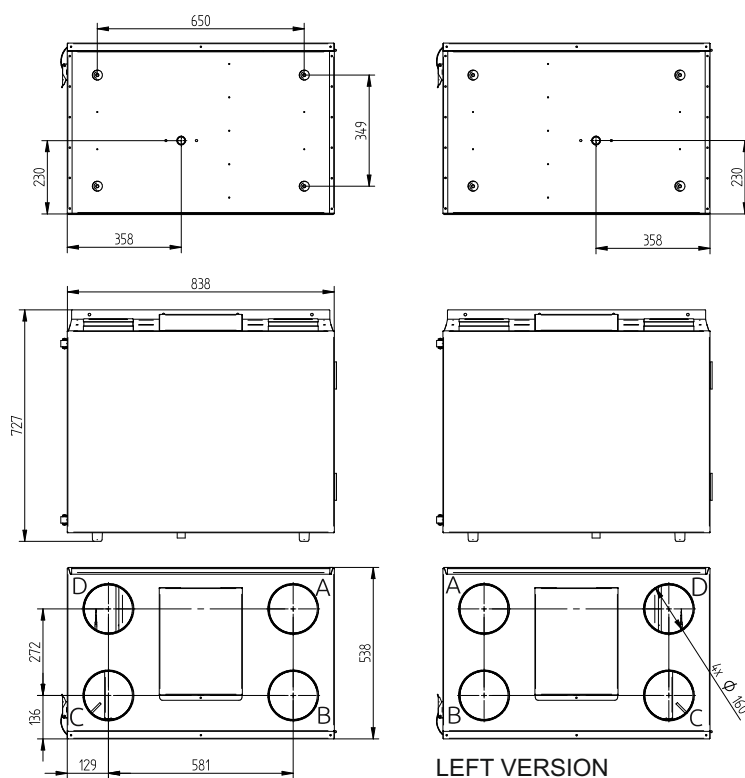

Resistance/Performance

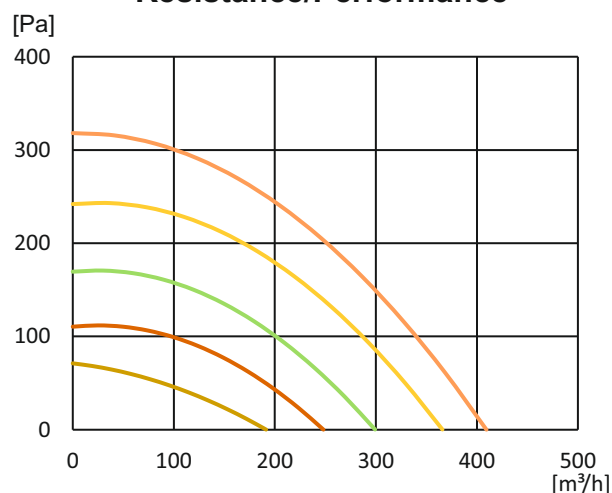

Efficiency/Performance

