


TECHNICAL DATA

400 H HI-TECH E

400 H HI-TECH L E

Maximum flow rate at 100 Pa	m ³ /h	400	400
Ventilated area up to	m ²	180	180
Energy efficiency class	-	A	A
Efficiency up to	%	91,2	91,2
Energy consumption	W	20-192	20-192
Preheater power	W	500	500
Diameter of the nozzles	mm	160	160
Sound power level Gear I	dB(A)	38	38
Filtration class	-	ISO COARSE 75% + ePM 10 50%	
Weight	kg	57	57
Type of exchanger	-	enthalpic	enthalpic
Automation	-	V2	V2
Wall controller	-	yes	yes
XF System	-	yes	yes
Internet module	-	yes	yes
Painted interior	-	yes	yes

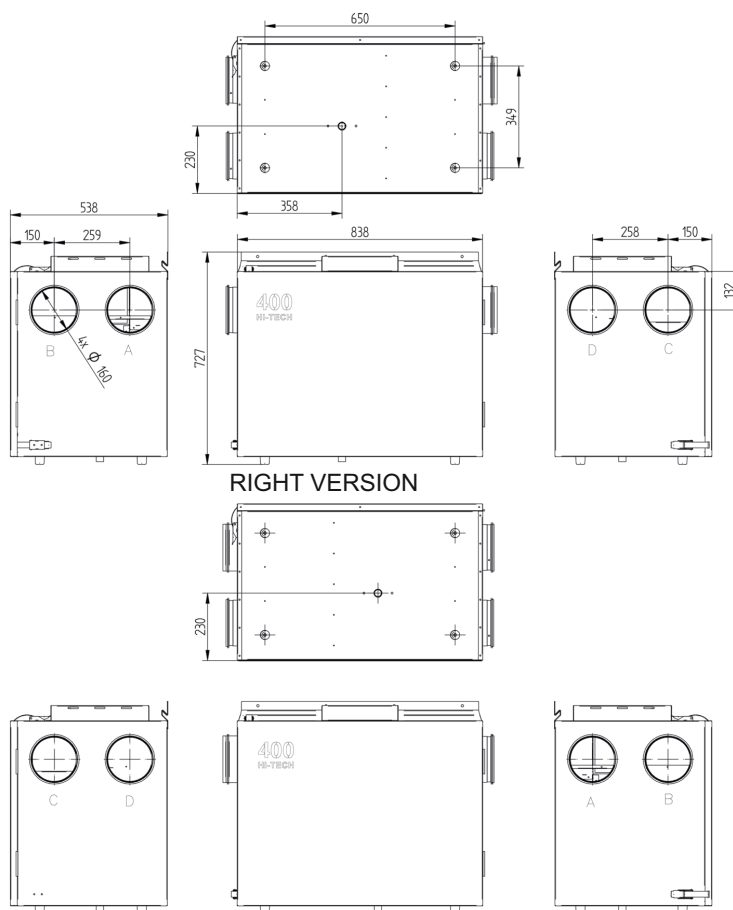

RIGHT VERSION

LEFT VERSION

- A - air drawn from outside the building
- B - air drawn from rooms
- C - air supplied to rooms
- D - air exhausted outside the building

