


## TECHNICAL DATA

|                             |                   | 600 H HI-TECH E             | 600 H HI-TECH E |
|-----------------------------|-------------------|-----------------------------|-----------------|
| Maximum flow rate at 100 Pa | m <sup>3</sup> /h | 600                         | 600             |
| Ventilated area up to       | m <sup>2</sup>    | 270                         | 270             |
| Energy efficiency class     | -                 | A                           | A               |
| Efficiency up to            | %                 | 90,5                        | 90,5            |
| Energy consumption          | W                 | 20-336                      | 20-336          |
| Preheater power             | W                 | 500                         | 500             |
| Diameter of the nozzles     | mm                | 200                         | 200             |
| Sound power level Gear I    | dB(A)             | 39                          | 39              |
| Filtration class            | -                 | ISO COARSE 75% + ePM 10 50% |                 |
| Weight                      | kg                | 65                          | 65              |
| Type of exchanger           | -                 | enthalpic                   | enthalpic       |
| Automation                  | -                 | V2                          | V2              |
| Wall controller             | -                 | yes                         | yes             |
| XF System                   | -                 | yes                         | yes             |
| Internet module             | -                 | yes                         | yes             |
| Painted interior            | -                 | yes                         | yes             |



- A - air drawn from outside the building
- B - air drawn from rooms
- C - air supplied to rooms
- D - air exhausted outside the building

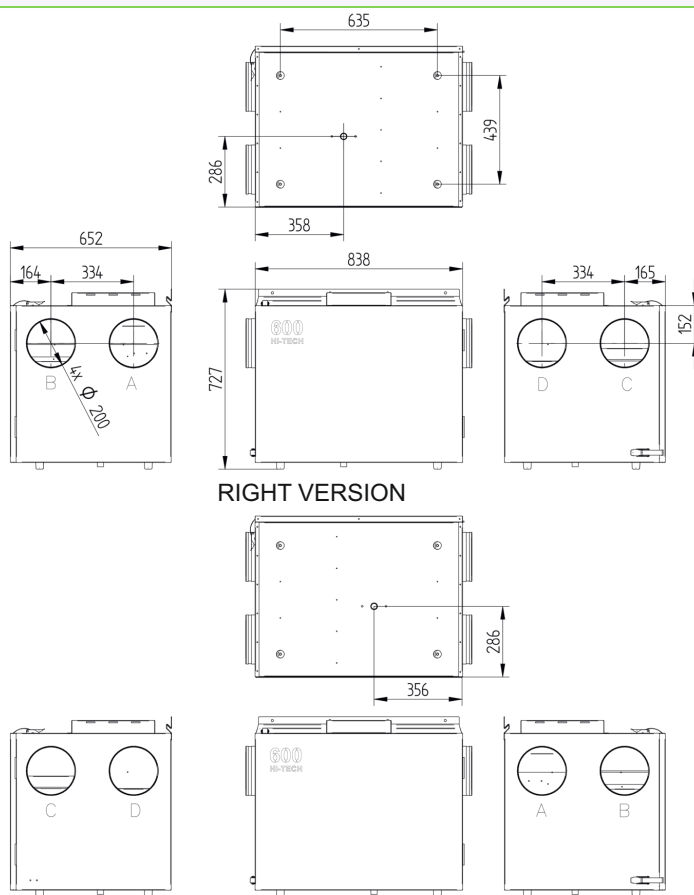