



TECHNICAL DATA

		600 H	600 H L	600 H XF	600 H XF L	600 H XF E	600 H XF L E
Maximum flow rate at 100 Pa	m ³ /h	600	600	600	600	600	600
Ventilated area up to	m ²	270	270	270	270	270	270
Energy efficiency class	-	A	A	A	A	A	A
Efficiency up to	%	87	87	87	87	90,5	90,5
Energy consumption	W	20-347	20-347	20-347	20-347	20-336	20-336
Preheater power	W	500	500	500	500	500	500
Diameter of the nozzles	mm	200	200	200	200	200	200
Sound power level Gear I	dB(A)	39	39	39	39	39	39
Filtration class	-	ISO COARSE 75% + ePM 10 50%					
Weight	kg	65	65	65	65	65	65
Type of exchanger	-	plastic	plastic	plastic	plastic	enthalpic	enthalpic
Automation	-	V2	V2	V2	V2	V2	V2
Wall controller	-	yes	yes	yes	yes	yes	yes
XF System	-	nie	no	yes	yes	yes	yes
Internet module	-	no	no	no	no	no	no
Painted interior	-	no	no	no	no	no	no

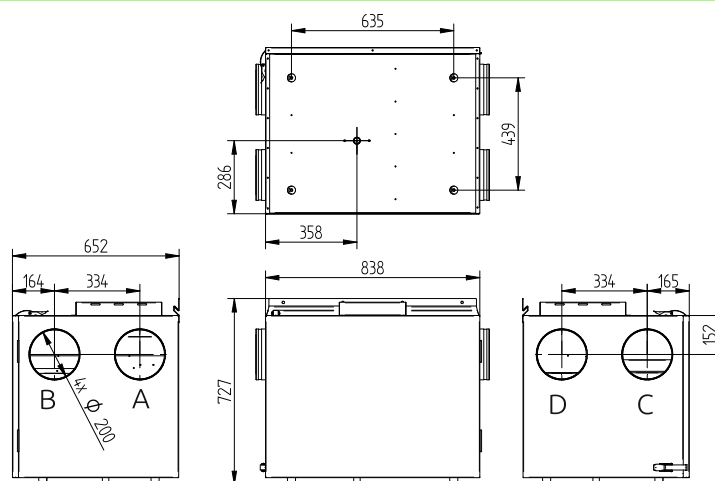

RIGHT VERSION

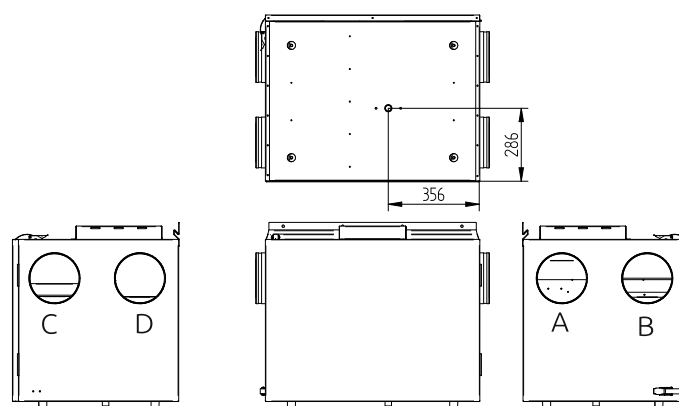

LEFT VERSION

- A - air drawn from outside the building
- B - air drawn from rooms
- C - air supplied to rooms
- D - air exhausted outside the building

