


TECHNICAL DATA		800 V/H XF	800 V/H XF L
Maximum flow rate at 100 Pa	m ³ /h	800	800
Ventilated area up to	m ²	360	360
Energy efficiency class	-	A+*	A+*
Efficiency up to	%	91	91
Energy consumption	W	34-330	34-330
Preheater power	W	2000	2000
Diameter of the nozzles	mm	250	250
Sound power level Gear I	dB(A)	40	40
Filtration class	-	ISO COARSE 75%	ISO COARSE 75%
Weight	kg	125	125
Type of exchanger	-	plastic	plastic
Automation	-	V2	V2
Wall controller	-	yes	yes
XF System	-	yes	yes
Internet module	-	no	no
Painted interior	-	no	no

*When using local demand control



- A - air drawn from outside the building
- B - air drawn from rooms
- C - air supplied to rooms
- D - air exhausted outside the building

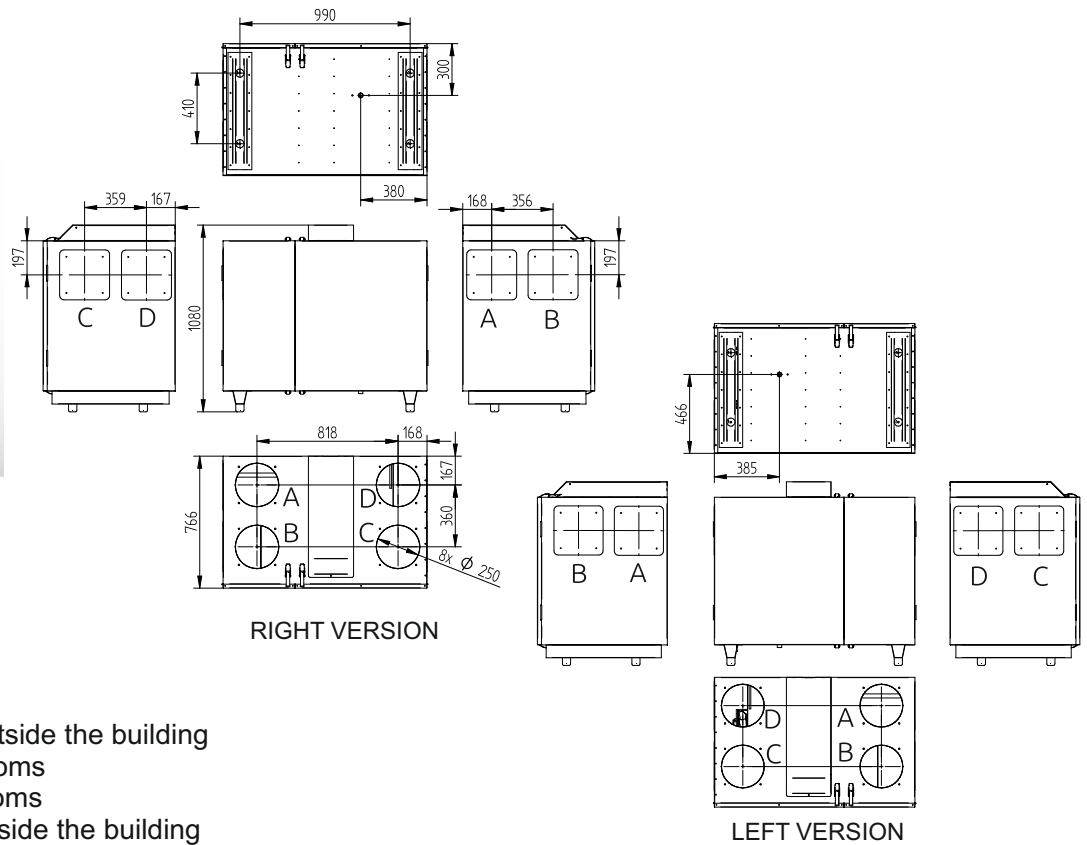